



**Constant voltage charging characteristics**

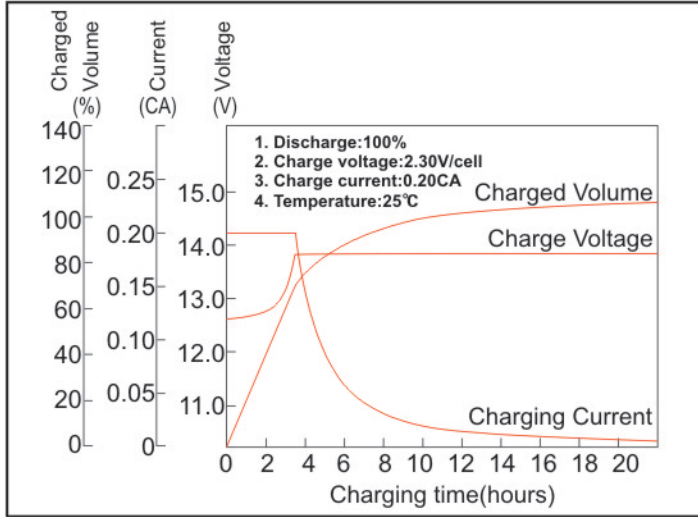

**Float Life**

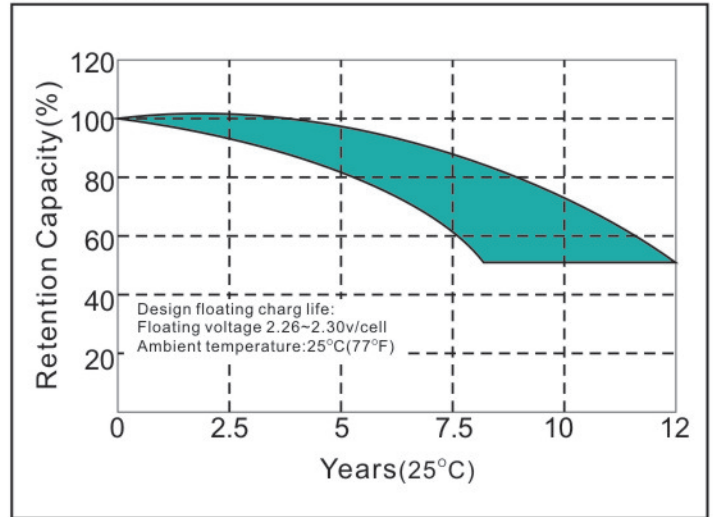

**Constant Current Discharge Characteristics(A,25°C)**

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	217.8	173.3	106.9	64.4	36.1	26.1	18.3	12.1	10.2	5.4
10.2V	206.9	166.3	103.0	61.8	35.6	25.7	18.0	12.0	10.1	5.3
10.5V	201.0	162.4	100.0	60.5	35.3	25.5	17.8	12.0	10.1	5.3
10.8V	194.0	158.4	97.8	58.7	34.9	25.2	17.6	11.9	10.0	5.2

**Constant Power Discharge Characteristic(Watt,25°C)**

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	2352.2	1902.8	1199.9	733.6	418.8	306.9	216.8	144.5	121.8	64.3
10.2V	2234.4	1826.6	1155.3	703.9	412.8	302.9	212.9	143.9	120.8	63.6
10.5V	2170.1	1782.0	1145.4	699.9	408.9	300.0	209.9	143.6	119.8	63.4
10.8V	2095.8	1739.4	1097.9	669.2	404.9	297.0	207.9	142.6	118.2	63.0

**Capacity Factors With Different Temperature**

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

**MODEL: PR100-12**

**NO.: 302010005-00127**


**POWER  
AGM**

**Cycle service life in relation to the depth of discharge**

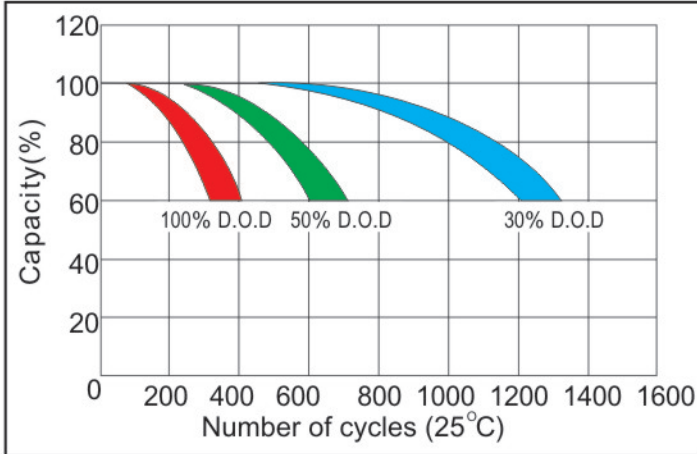

**Plane Chart:**

Unit:(mm) Terminal type:(T3)

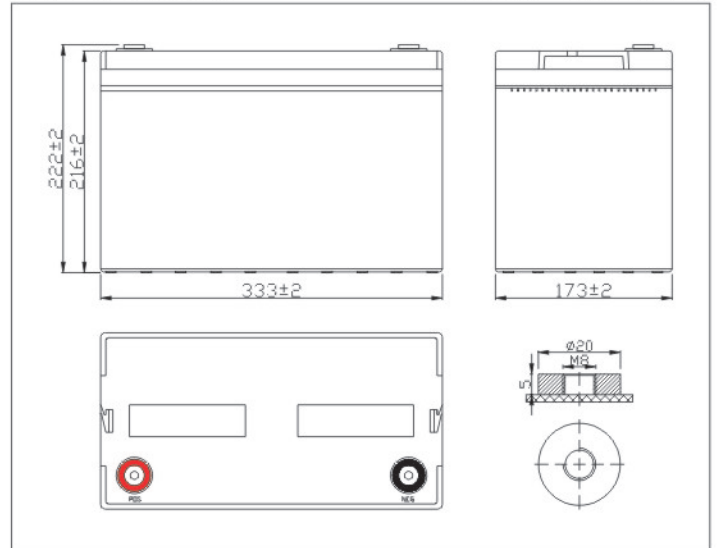


ISO 9001  
ISO 14001  
OHSAS18001




**Parameter Chart:**

Volts		12V	
Capacity(25°C)		10 hours rate (10A)	100Ah
Discharge Current Testing (25°C)		1 hours rate (55A)	59Ah
		3 hours rate (25A)	79Ah
Internal Resistance		Full Charged Battery 25°C	4.2mΩ
Capacity Affected By Temperature		40°C	104%
		25°C	100%
		0°C	83%
		-15°C	65%
Residual Capacity (25°C)		Capacity After 3 Months Storage	91%
		Capacity After 6 Months Storage	82%
		Capacity After 12 Months Storage	65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 30A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		31.2Kg	

**Residual Capacity**

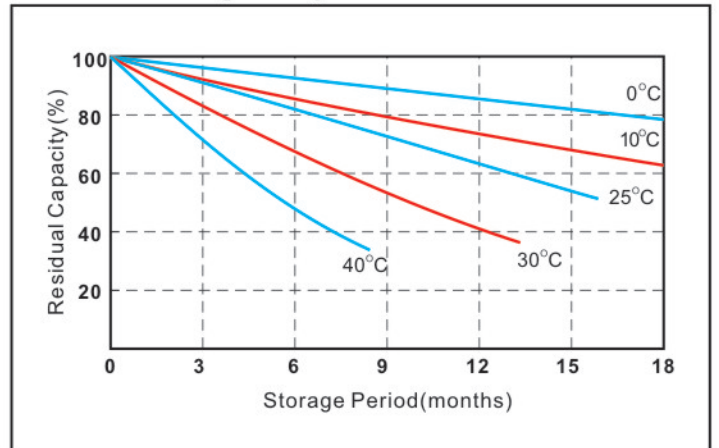

**Discharge Current 25°C**

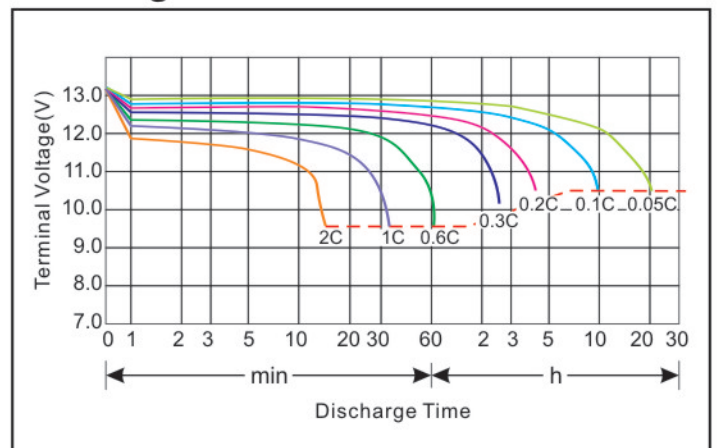

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.